

ELSKY EPC9000 Specification

Pc diagram



Pc diagram



Interface diagram



Pc bottom diagram

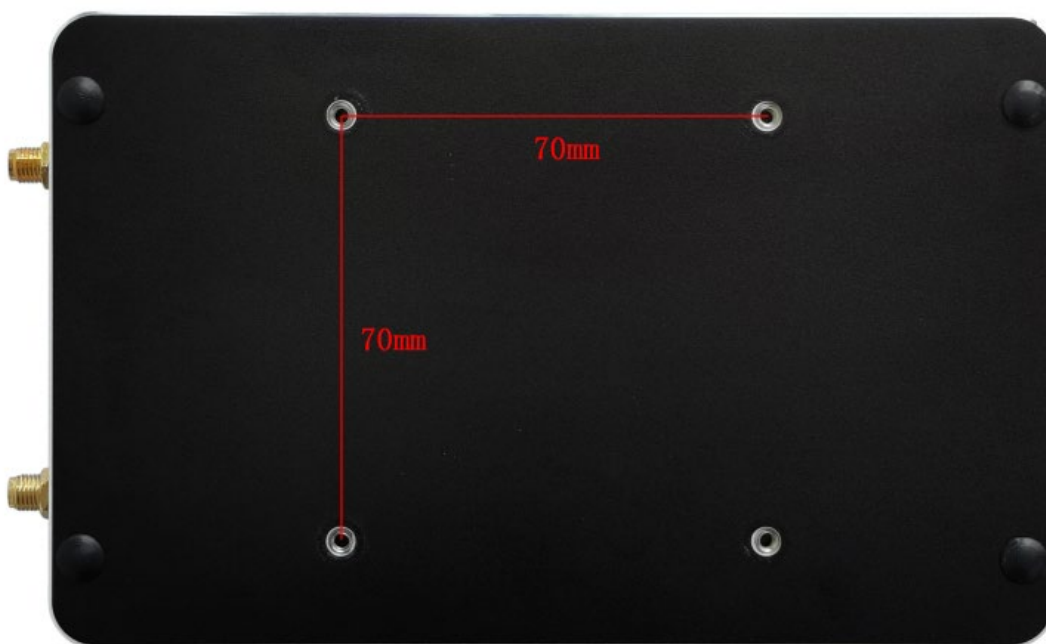




图 片 仅 供 参 考 ， 请 以 实 物 为 准 ！

Product model order optional:

Pc model	4K	System	LAN	USB2.0	USB3.0	Built-in storage	Running memory	Power supply
EPC9000	2K@120Hz 4K@60Hz	Android 7.1 Android 11.0 system	1	1	1	16G/32G optional	2G/4G optional	12V

PC model	EPC9000	
Motherboard model	EK9900	
Size	168mm*106mm*20mm	
CPU	Rockchip RK3399, dual Cortex-A72+quad Cortex-A53 size core CPU structure, frequency up to 1.8GHz	
Power supply	1*DC_IN	DC head inner diameter 2.0mm, support 12V, recommended to use 12V3A or above power supply
Built-in storage	64G	
Memory	4G	
Network function	1*LAN	Integrated Realtek 8211F Gigabit Ethernet chip
	1*4G/WIFI	Support 4G module
	1*WiFi_ANT1	Wifi/BT antenna interface (Built-in BL-M8821CS1 Wifi /Bluetooth two-in-one module)
	1*SIM_CARD	SIM card slot
Display function	1*HDMI 2.0	Support resolution 1920*1080@120Hz / 3840*2160@60Hz
USB function	1*USB2.0	The USB speed of the black group is USB2.0
	1*USB3.0	The USB speed of the blue group is USB3.0
	USB1 port support OTG;control via USB-OTG pin	
Sound function	Integrated ES8336 two-in-one audio controller	
	1*Audio	Audio output ; 3.5mm standard interface,supports one-way three/four-segment earphone insertion(black)
Switch function	SW1 button	Reset button
	SW2 button	Shift button
	SW3 button	Enter the RECOVERY mode or USB LOADER upgrade mode
Other I/O	1*SD_CARD	Data storage
	1*IR	Support wireless data transmission
Other function	Support power on,hardware reset function	
Operating environment	Working temperature: -10℃~60℃; working humidity: 5%~95%relative humidity,non-condensing	
Operating system	Android 7.1 、 Android 10.0 system	